

Specifications

Motor
12V DC, 53 RPM, automatic thermal protection, permanent lubrication

- Mechanics**
- Steel chassis, T-Rail and trolley, full reinforced chain drive mechanism (63:1 gear reduction and adjustable door arm)
 - Auto-force adjustment for changing weather and environmental conditions
 - Electronic limits for easy setup
 - DC Wi-Fi logic board with built-in surge suppressor (for replacement logic boards, order part 030DCT)

Power
120V AC, 60 Hz voltage, 2.7A current rating, UL listed, 4' power cord (3-prong)

Speed
9" per second upward, 6.5" per second downward

Lighting
60-Watt Max Equivalent LED (Bulb Not Included)

Dimensions
Opener head: 14.6" L x 8.2" W x 7.2" H

Rail Options:	7' (1707)	8' (1708)	10' (1710)
Installed Length:	124"	136"	160"
Max Opening:	7' 6"	8' 6"	10' 6"

Headroom clearance required: 2"

Warranties
5 Year: Motor
1 Year: Camera, Parts and Accessories

Security+ 3.0™
Radio controls:
Operating range up to 1300 ft; Operating temperature: -40F to 150F; One 3-Button Remote Control (L993S). Remote Control Code Format: Security+3.0; Garage Door Opener Code Format: Security+3.0; Anti-burglary coding.

Encrypted controls:
Multi-Function Control Panel (L955W): Manage lighting and access from one spot.


myQ® Radio
902-928 MHz 50-channel FHSS (frequently hopping spread spectrum); Provides 2-way communication from garage door opener and myQ accessories; Enables monitoring and control of garage door openers via smartphone or tablet.

HomeLink® compatible (version 4.0 or higher)
Visit HomeLink.com for additional information.

Carton 1 shipping details
Dimensions: 10" x 20.8" x 9.1"
Contents: Garage Door Opener Head (4690L), Garage Door Opener Head (2100L), Control Panel (L955W), 3-Button Remote Control (L993S), The Protector System Safety Reversing Sensors.
Weight: 14 lbs.

Carton 2 shipping details
Dimensions: 10'4" x 5" x 5" (for 7' Rail)
Contents: Assembled Solid-Steel Chain T-Rail
Weight: 20 lbs

Builder

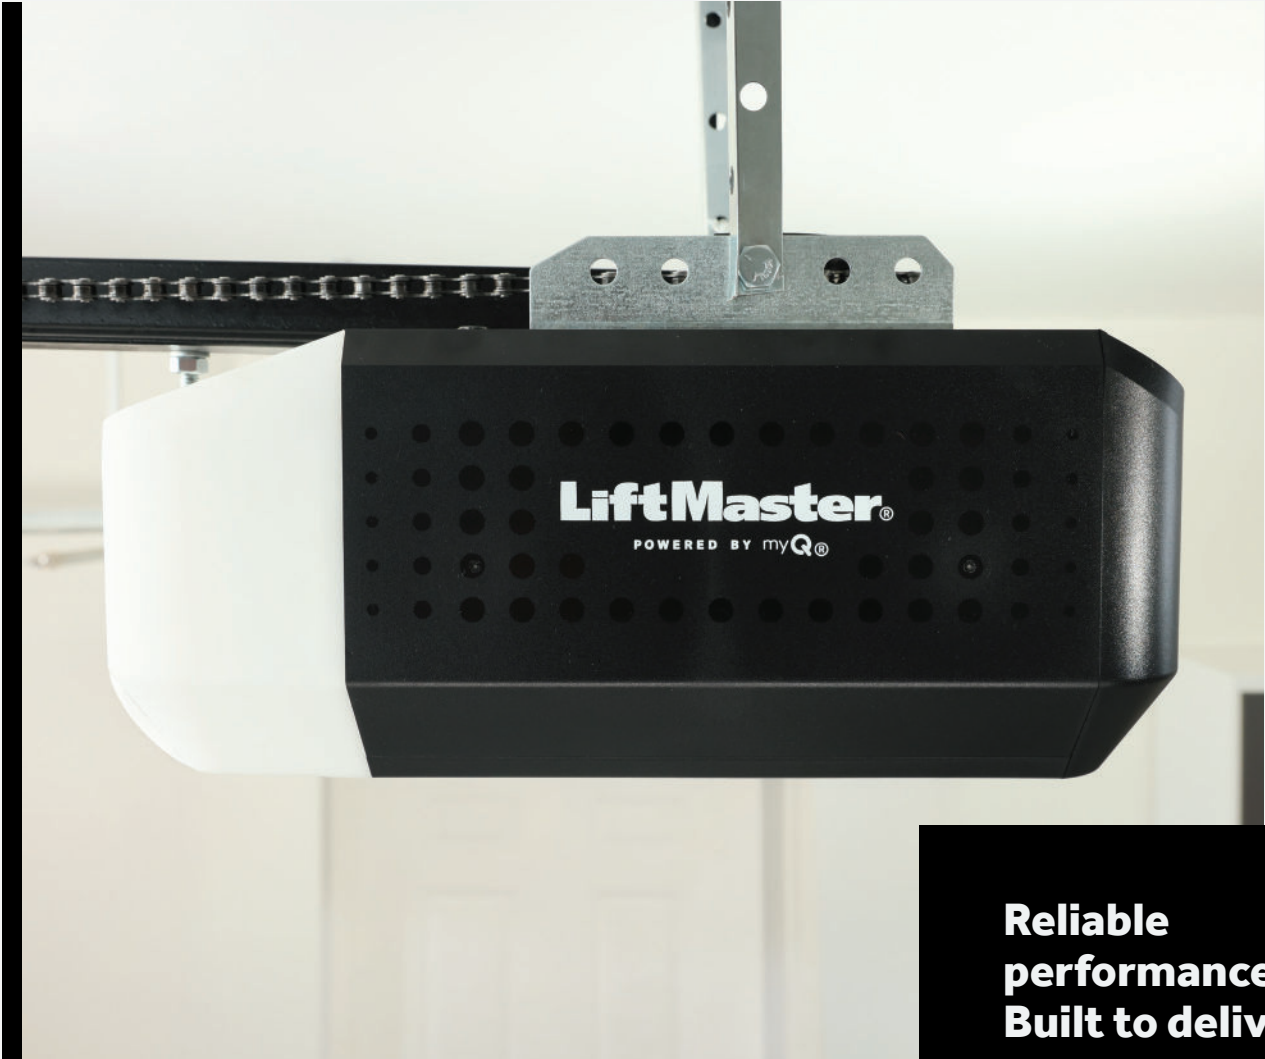


Reliable performance. Built to deliver.

Dependable garage access solutions built for the demands of high-volume construction projects—reliable, efficient, and backed by a trusted name.

2100L

1/2 HPs DC Motor with Wi-Fi®



Built for you. Installed by pros.

With expert installation, you'll get a perfect fit, safe setup, and full walkthrough of your system. It's the LiftMaster difference: professional quality, professionally installed.

Visit LiftMaster.com to find a dealer near you

2100L

The LiftMaster 2100L is a reliable garage access solution built for high-volume projects. With durable performance, essential smart access via myQ®, and the backing of a trusted brand, it's a smart pick for pros who need quality and efficiency.



Features that matter most

myQ® Connectivity

Open. Close. Monitor. From anywhere.

Chain Drive + DC Motor

Designed for smooth and quiet performance.

Worry-Free Warranty

Backed by a 5 year motor and 1 year chain warranty.

1/2 HPs Motor

Smooth, consistent strength for standard doors..

Built-In Light

Safer entry and exit, day or night.

Multi-Function Control Panel


Manage lighting and access from one spot.

Standard Garage Lighting

Illuminate your garage with dependable built-in lighting for safer, easier access—any time of day.



Included in the box

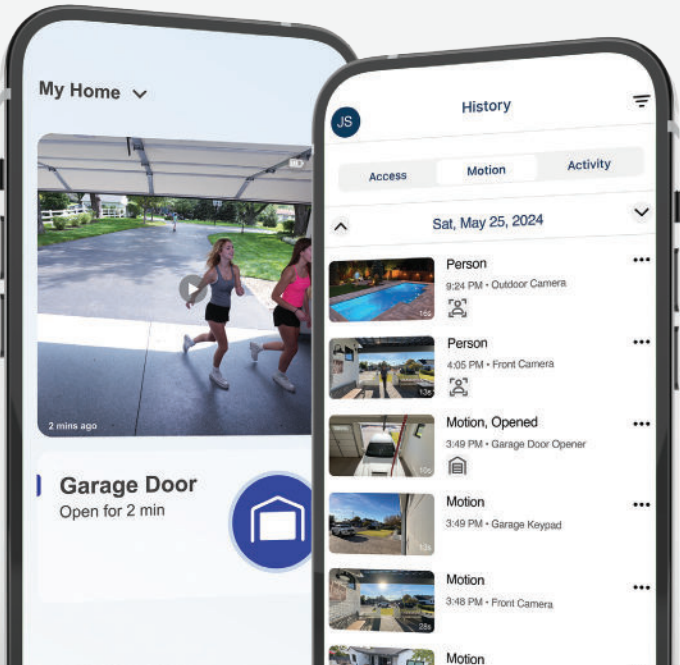

Do more with myQ

Use the myQ app to control, secure and monitor your garage and conveniently share and manage access to your home without sharing passcodes or keys. Also, take the hassle out of service repair and easily connect to a trusted Dealer through the myQ app.



3-Button Remote Control

Operates up to 3 openers or myQ light accessories. Safeguards your home with Security+ 3.0™.

L993S



Multi-Function Control Panel

Operates the garage door opener and lights from inside the garage. Allows for fast, easy programming of accessories with learn button.

L955W